



SB220 THRU SB2200

SCHOTTKY BARRIER RECTIFIER


Reverse Voltage - 20 to 200 Volts Forward Current - 2.0 Ampere

FEATURES

The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
 Metal silicon junction, majority carrier conduction
 Low power loss, high efficiency
 High forward surge current capability
 High temperature soldering guaranteed:
 260°C/10 seconds, 0.375" (9.5mm) lead length,
 5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: JEDEC DO-15 molded plastic body
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 0.014 ounce, 0.40 grams

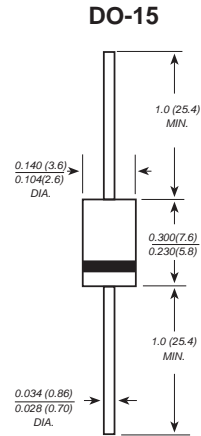

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	SB 220	SB 230	SB 240	SB 250	SB 260	SB 270	SB 280	SB 290	SB 2100	SB 2150	SB 2200	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	70	80	90	100	150	200	V
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	49	56	63	70	105	140	V
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	70	80	90	100	100	200	V
Maximum average forward rectified current 0.375" (9.5mm) lead length (see fig.1)	$I_{(AV)}$	2.0											A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	60.0											A
Maximum instantaneous forward voltage at 2.0A	V_F	0.55		0.70		0.85			0.95			V	
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	I_R	0.5					10.0		5.0		2.0		mA
Typical junction capacitance (NOTE 1)	C_J	220				80							pF
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	50.0											$^\circ\text{C}/\text{W}$
Operating junction temperature range	T_J	-55 to +125				-55 to +150							$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 to +150											$^\circ\text{C}$


Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
 2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted



RATINGS AND CHARACTERISTIC CURVES SB220 THRU SB2200

AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

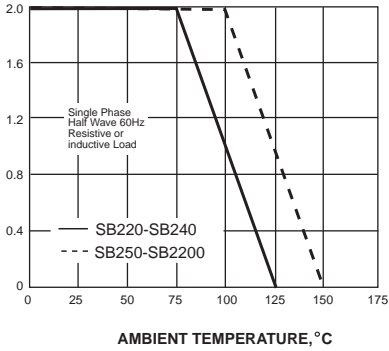

PEAK FORWARD SURGE CURRENT, AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT


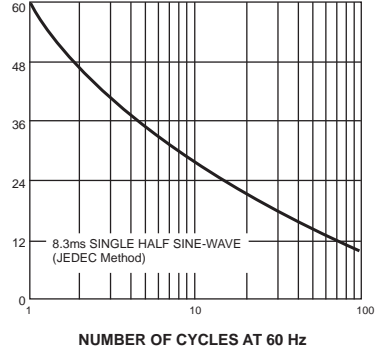


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

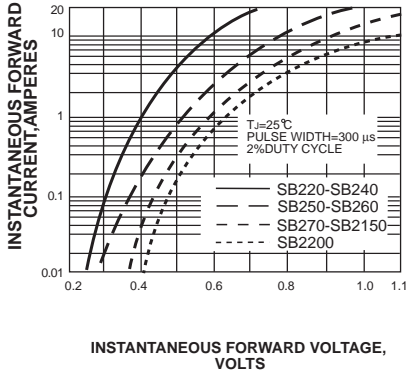

INSTANTANEOUS REVERSE CURRENT, MILLIAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS


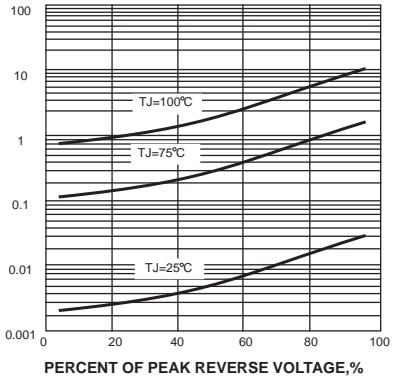


FIG. 5-TYPICAL JUNCTION CAPACITANCE



TRANSIENT THERMAL IMPEDANCE, °C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

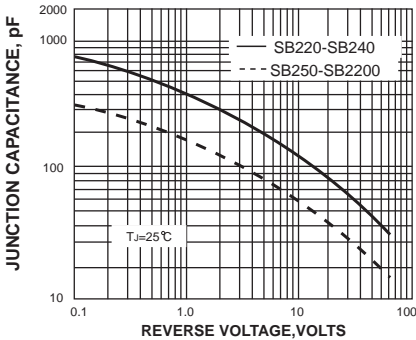